



7 UHQFK 026 %DUULHU 6FKRWWN\ 5H

d^Wîi>òì
!"

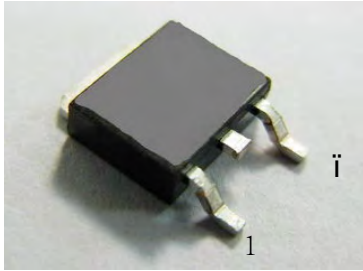

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &R#6OLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&' &GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGLJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPXPHSHVSHUNYHYURQHW DJH		9550		9
0D[LPXPHYHURJHJZDUG UFXEWHHJW	GHYLFH	,) \$9		\$
	SHGLRGH			
3HDN IRVZDURBUHQW VLKDDHQH ZDYH VXSHULPSRVHGRFSGURVGHG		,)60		\$
2SHUDMXQDQGRQWRUDJH WHPSHUDW		XUH76D*QJH	WR	f&
7\SLFVCHUPDO USHVULVQHDQFH		72	5\$-&	f& :
,QVWDQWDQHRROWRUJZDUG SHGLRGH		9)	7<3	0\$;
	,) \$		7- f&	9
	,) \$		7- f&	
	,) \$		7- f&	
,QVWDQWDQHRXUUSHQWROVH UDWHYHYURQHW DJH		,5		
			7- f&	P\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$ f & X Q @ M K H Q Z L W H H G

3 32:(5',66,3\$7,21 :

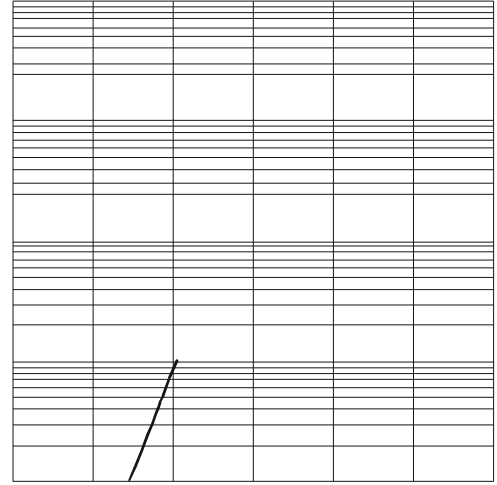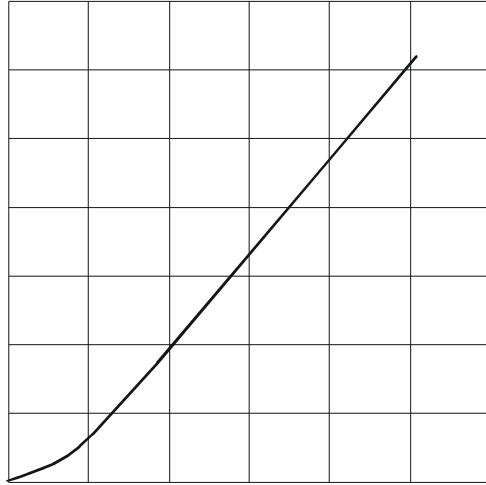


) \$9 \$9(5\$*()25:\$5' &855(17 \$
)LJXUH)RUZDUG 3RZHU 'LVVLSDWLRQ


PACKAGE OUTLINE DIMENSIONS

1 R W H X Q L W , Q P P

0DUNLQJ ,QIRUPDWLRQ

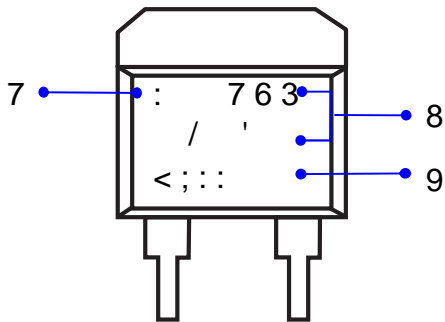


7 : &RPSDQ\ V WUDGHPDUN
83URGXFW PRGHO 763 / '
93'& LQIRUPDWLRQ

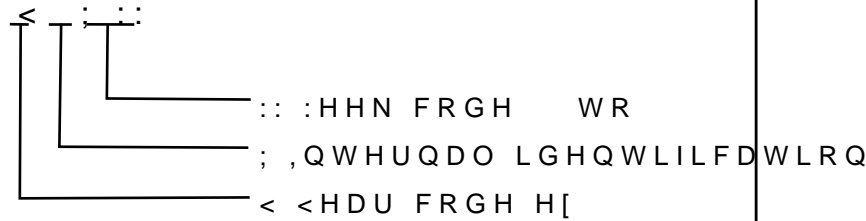


3DFNDJLQJ ,QIRUPDWLRQ



5HHO 'LPHQVLRQV



,QVLGH %R[



2XWVLGH %R[

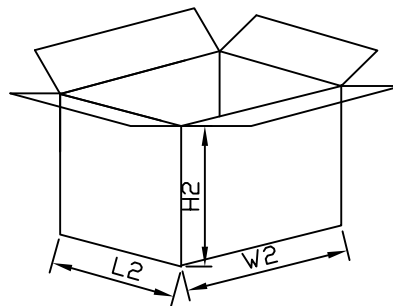

3DFNDJLQJ ,QIRUPDWLRQ

12	81,7	5HHO 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6L]H	PP	&	\$	%	/	:	+	/	:	+
47<	3&6 6PDO	SHVWDJH	3&6 UHHO	3&6 UHHO	WRWDO	3&6 FDU	WRWDO	WRWDO	WRWDO	WRWDO
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		