



Features

- Advanced trench technology
 - Low forward voltage drop
 - Low power losses
 - High efficiency operation
 - Lead Free Finish, RoHS Compliant
-


RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

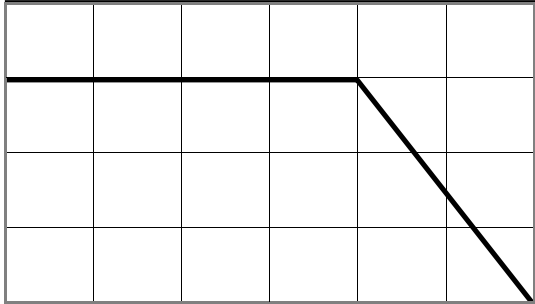


Current Derating, Case

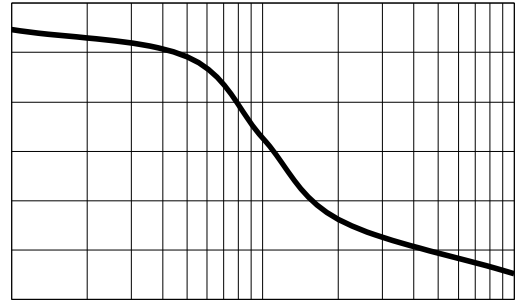


Maximum Repetitive Surge Current

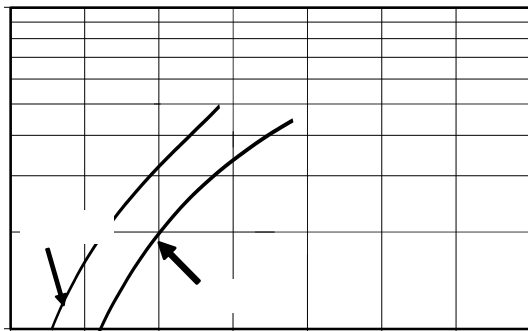

Typical Forward Voltage

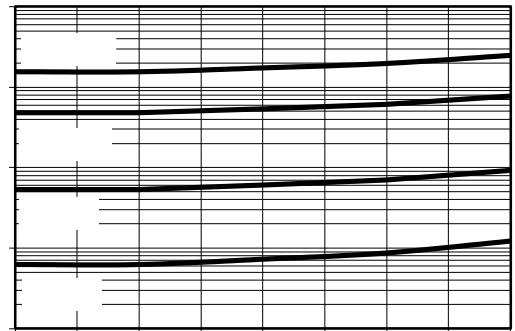


Typical Reverse Current

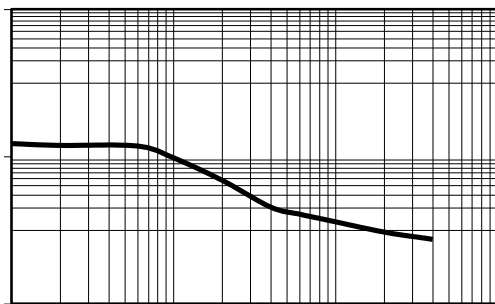


Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS

SMAF

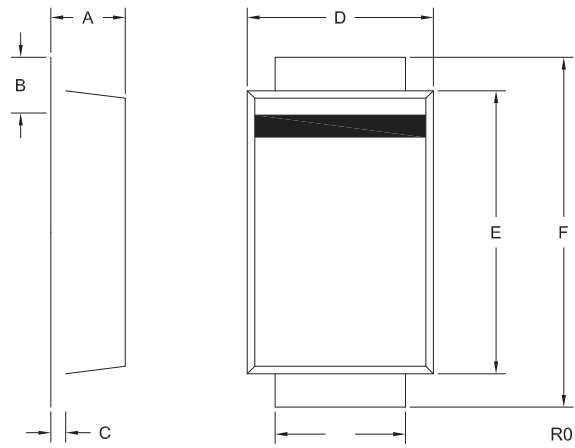


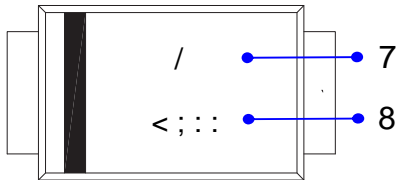

①Product model : TSP3L40AF is abbreviated to 3L40

②PDC information

Y X WW

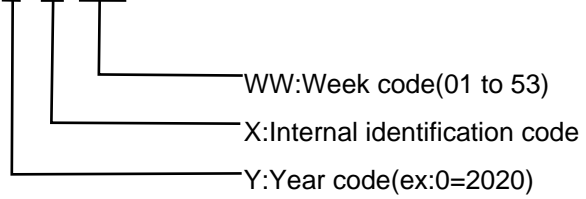

3DFNDJLQJ , QIRUPDWLRQ

1.Reel Dimensions

