



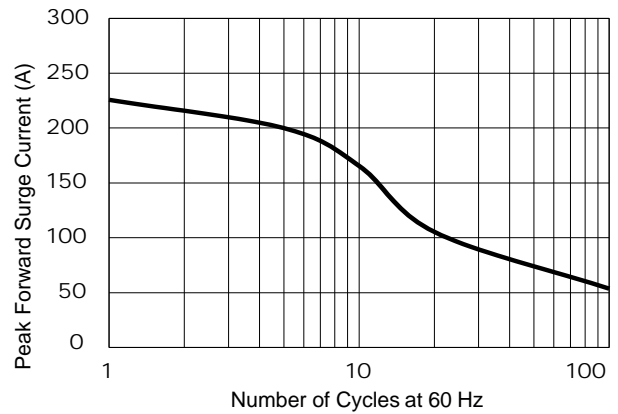



## RATINGS AND CHARACTERISTICS CURVES

f & X Q O H V Q R W K B U Z L V H

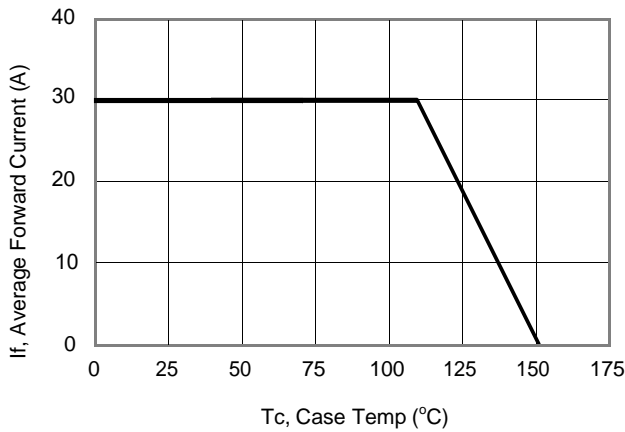

Current Derating, Case

Maximum Repetitive Surge Current

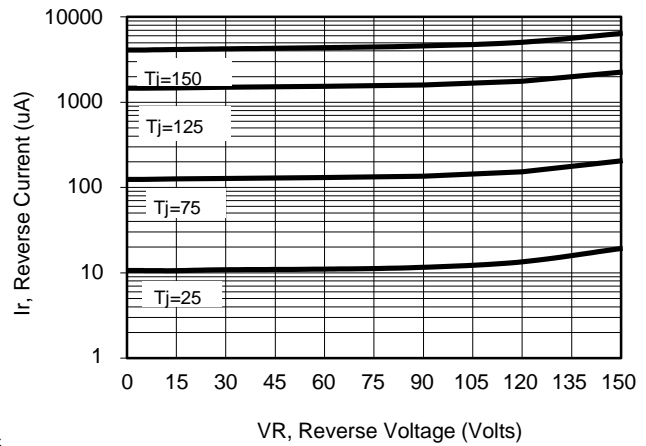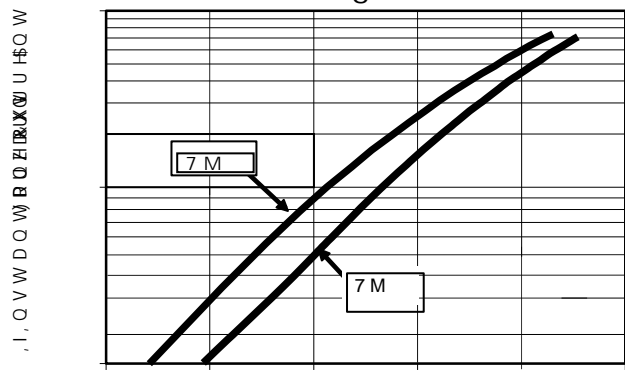


9 1, Q V W D Q W D Q H R R O W B Q H D U G

VR, Reverse Voltage (Volts)


d Ç %o&] } (EoAs } (E š P

Typical Reverse Current

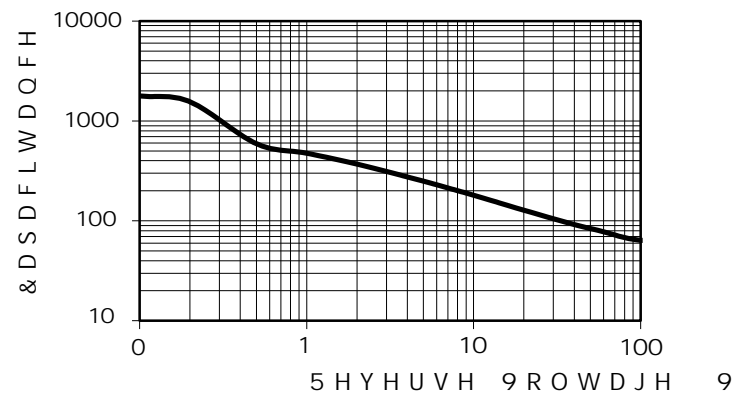


Typical Junction Capacitance


# PACKAGE OUTLINE DIMENSIONS

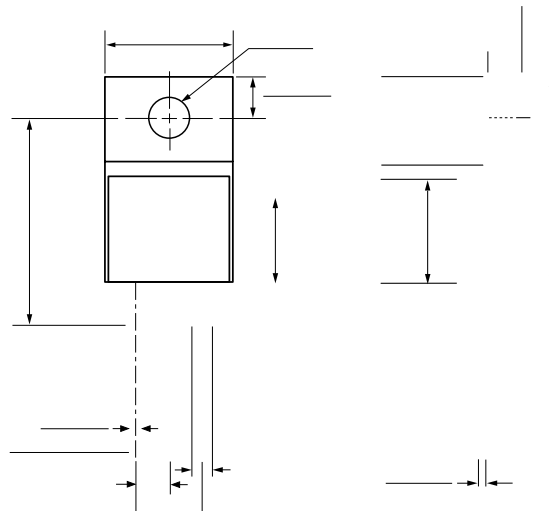

**Marking Information**

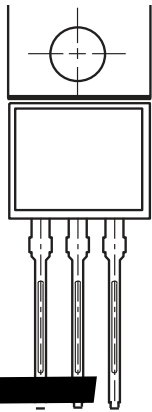


3URGXFW 765 GHQ&7RU 76/5 &7)  
 3'& LQIRUPDWLRQ

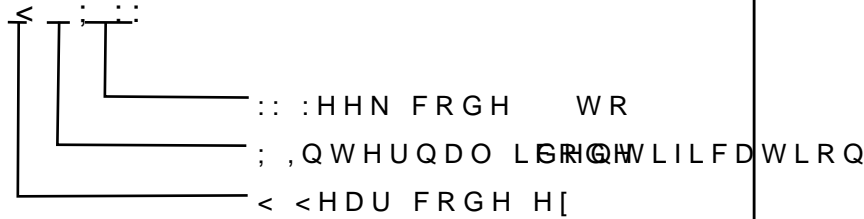

**Packaging Information**

7XEH 'LPHQVLRQV

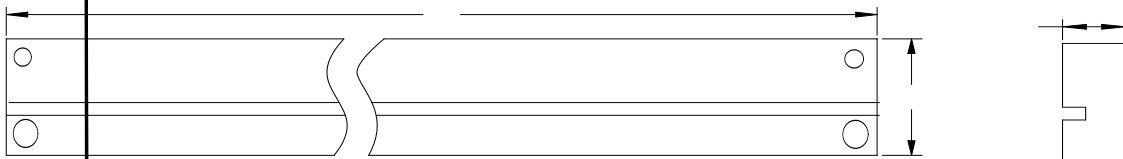

,QVLGH %R[

2XWVLGH %R[

**Packaging Information**

12	8	7XEH 'LPHQVLRQV			,QVLGH %R[			2XWVLGH %R[		
		\$	%	&	/	:	+	/	:	+
6LH	PP									
47<	3&6	3&6 7XEH			6PDO&7RU 76/5 &7) WXE&7RU 76/5 &7)			3&6 FDU&7RU 76/5 &7)		
1RWH		7ROHUDQF&7RU 76/5 &7)			PP" PP			PP" PP		