




RATINGS AND CHARACTERISTICS CURVES


7\$

f & XQOHVQRWKBUZLVH

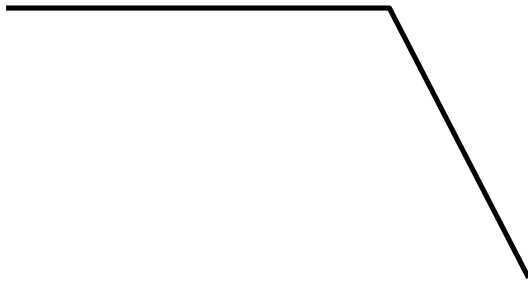

7F&DV7HPŠ&


Current Derating, Case

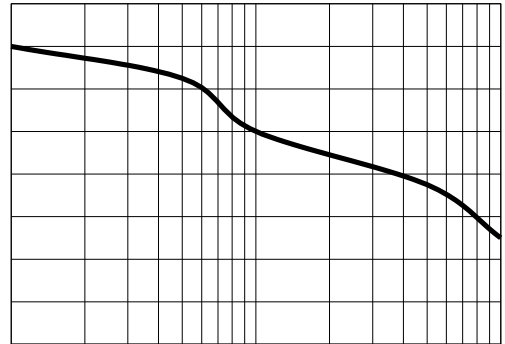

1 XPERR\F@HW+ ]

5HYHUVH & XUHQW X\$

Maximum Repetitive Surge Current

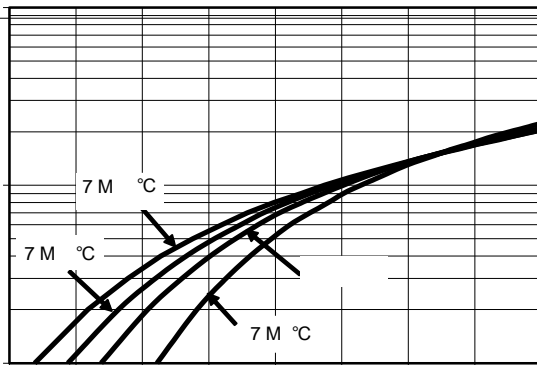


91 , QVWDQWDQHRXV)RUJZDRUG

Typical Forward Voltage



95 5HYHUVH 9ROWDJH 9ROWV

Typical Reverse Current

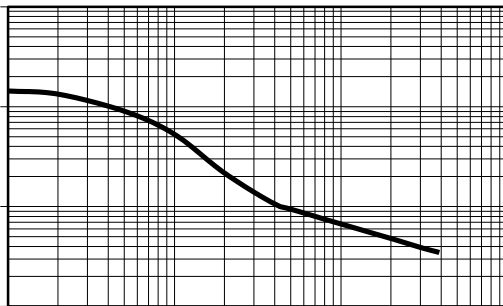


5HYHUVH 9ROWDJH 9

Typical Junction Capacitance


, QVWDQWDQHRXV )RUZDU

# PACKAGE OUTLINE DIMENSIONS

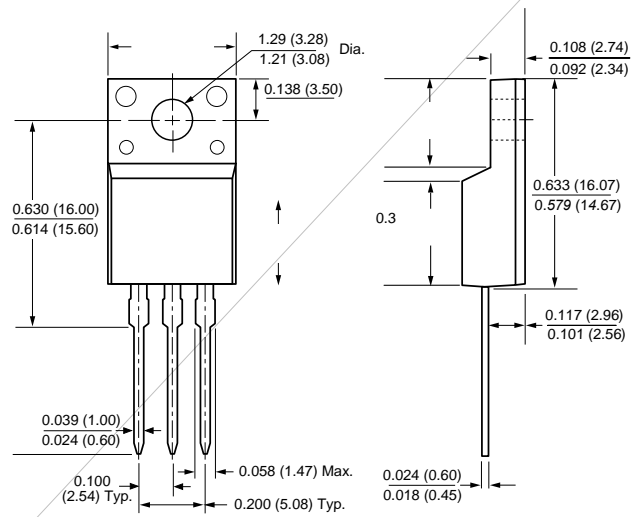

**Marking Information**

3URGXFW 765 / &7) 3' & LQIRUPDWLRQ

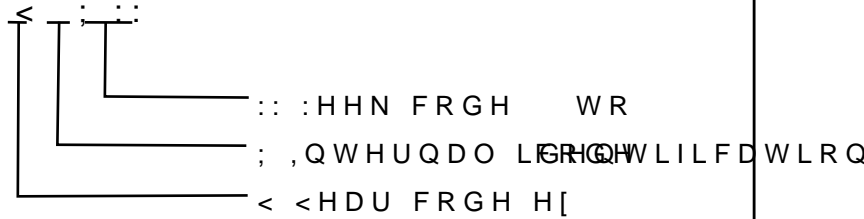

**Packaging Information**

7XEH 'LPHQVLRQV



,QVLGH %R[

2XWVLGH %R[

**Packaging Information**

12	81,	7XEH 'LPHQVLR			,QVLGH %R[			2XWVLGH %R[		
6L]H	PP	\$	%		/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDO SHFW DJH 3&6 WXEH WRWDO			3&6 FDUERGLWRWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		